

WALL HOOD

STANDARD CONSTRUCTION:


Hood: 18 ga. Galvanized Steel

Birdscreen: 0.50" x .050" [12.70mm x 1.27mm] Expanded Aluminum (2B)



Finish: Standard Mill

OPTIONS:

- Aluminum Construction 0.090" [2.29mm]
- Stainless Steel Construction (18 ga.)
- Powder Coated (baked at 410°F [210°C])
 - Polyester
 - Fluoropolymer 70%
- 90° Hood (see detail)

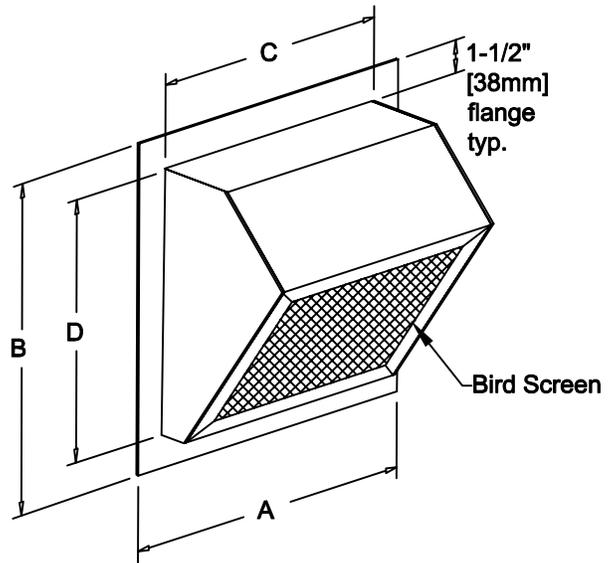

90° HOOD OPTION:

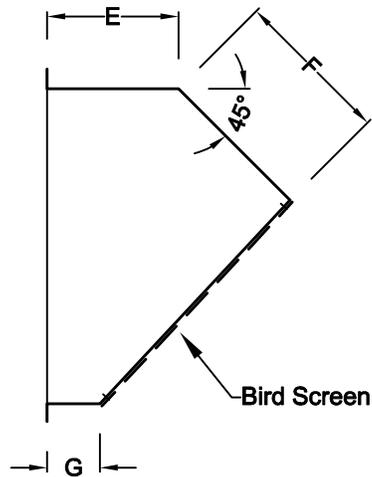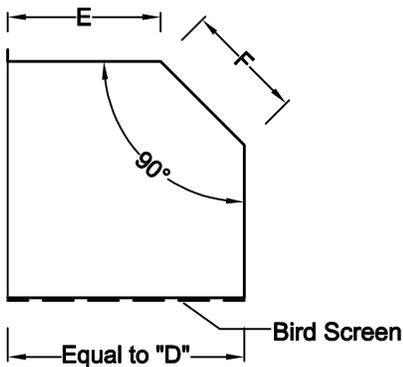

Qty.	C	D	A & B	E	F	G	Tag

A & B include 1-1/2" [38mm] flange

Due to continuing research, United Enertech reserves the right to change specifications without notice.

UnitedEnertech

3005 South Hickory Street
 Chattanooga, Tennessee 37407
 Tel: (423) 698-7715
 Fax: (423) 698-6629
www.unitedenertech.com

Wall Hood
 DRAWN BY:
CLJ

DATE:
9/17/01

REV. DATE:
9/19/25

REV. NO.:
9

DWG. NO.:
B-16