SIEMENS

Technical Instructions

Document No. A6V11486815 April 11, 2022

OpenAir® GRD Series Electronic Damper Actuator

UL Listed Fire/Smoke and Smoke Control Dampers 2-Position, 30-second Run Time, 15-second Spring Return Time





Description	The OpenAir direct coupled, fast-acting, two-position, spring return electronic actuators are available as 24 Vac/dc, 120 Vac, and 230 Vac models. They are intended for use on UL-listed smoke control dampers and combination fire/smoke rated dampers.					
Features	• Optional built-in auxiliary switches: Fixed switch points at 5° and 85° rotation.					
	 Optional built-in Electronic Fusible Link (EFL) capability with four temperature ratings: 165°F (74°C), 212°F (100°C), 250°F (121°C), and 350°F (177°C). 					
	Reversible fail-safe spring return.					
	High temperature polymer housing.Pre-cabled, insulated lead wires.					
	• Fifteen-second mechanical fail-safe at rated torque and temperature.					
	Application	This actuator is used for the control of dampers requiring up to 30 lb-in (3.4 Nm) driving torque. It is intended for control of UL-listed smoke control dampers and combination fire/smoke HVAC dampers. This actuator is designed to meet the 2002 revisions to the UL 555/555S and the AMCA Standard 520 specifications.				

Product Numbers

Product Number*	Torque	Voltage			Control Signal	ity		itch
	30 lb-in (3.4 Nm)	24 Vac/dc	120 Vac	230 Vac	2-Position	EFL Capability	3-ft Plenum Cable	Auxiliary Switch
GRD121.1U	•	٠	_	—	•	•	•	—
GRD126.1U	•	•	Ι		•	•	•	•
GRD221.1U	•		•	_	•	•	٠	_
GRD226.1U	•			_	•	•	۲	•
GRD321.1U	•		-		•	•	۲	_
GRD326.1U	•	_	_	•	•	۲	۲	•

Warning/Caution Notations

WARNING	Â	Personal injury or loss of life may occur if you do not perform a procedure as specified.
CAUTION:		Equipment damage may occur if you do not perform a procedure as specified.

Service


WARNING:

Do not open the actuator. Personal injury may occur if opened. Opening the actuator voids the warranty.

If the actuator is inoperative, replace the unit.

Specifications	Operating v	oltage		24 Vac ±20% 24 Vdc +20%, -10%		
Power supply	Fre	equency	50/60 Hz 120 Vac ±10%			
	Fre	equency	60 Hz 230 Vac ±10%			
	Power Cons		Running	Holding		
	GRD12x	-	~14 VA/8W	~4VA/2W		
	GRD22x	-	~12 VA	~4VA		
	GRD32x	.10:	~12 VA	~4 VA		
		CAUTION: Continuous use at voltages damage the actuator.	above the recommended	d tolerances may		
Function	Running tor	que	30 lb-in (3.4 Nm) (minimum)			
	Stall torque	(minimum)	80 lb-in (9 Nm)			
	Powered ru	ntime for 90°	30 seconds nominal			
		e closing (on power loss) ring return	15 seconds maximum			
	Nominal and	gle of rotation	95°			
Life Expectancy			Minimum 20,000 f	ull stroke cycles		
Mounting	Damper sha	ıft size	0.5-inch (12,7 mm) round			
_	Damper sha	aft length, minimum	1.4-inch (36 mm)			
Housing	Enclosure		NEMA 1/IP40			
•	Material		High temperature polymer			
Ambient conditions	Operation		0°F to 140°F (-18°C to 60°C) one time 350°F (177°C) 1/2 hour per UL555S			
	Storage and	l transport	–40°F to 158°F (–40°C to 70°C)			
	Ambient hui	midity (non-condensing)	Maximum 95% rh non-condensing			
	Teflon® cab	le	400°F (200°C)			
Fixed Dual End Switches	Fixed Dual I AC rating	End Switches	24 Vac to 250 Vac, 24 Vdc			
			6A resistive/ 2 FLA/12 LRA			
	Temperatur	e rating	350°F (177°C)			
Agency certification			UL60730			
			cUL CSA 60730			
			CE Conformity for and industrial envi	residential, commercial, ronments		
			Australian RCM co China-RoHS with Use Period	onformity Environmental Protection		
Miscellaneous	Pre-cabled Length:		3 ft (0.9m)			
	-		19/30 strand 18 G	A		
	Dimensions		8.5-in H × 3.5-in W × 3-in D (215.9 mm H × 88.9 W mm × 76.2 D mm)			
	Weight		≈4 lb (1.8 kg)			
	Country of C	Drigin	USA			

Accessories




Electronic Fusible Link (EFL) ASK791.165 (165°F [74°C] operation) ASK791.212 (212°F [100°C] operation) ASK791.250 (250°F [121°C] operation) ASK791.350 (350°F [177°C] operation)

NOTE: Determine and order appropriate actuator before selecting EFL.

Figure 1. Electronic Fusible Link.

Operation When power is applied, the actuator coupling moves toward the open position, 90°. The actuator opens in **30** seconds nominal, 90° at 60 Hz. In the event of a power failure or when operating voltage is turned off, the actuator returns to the **0** position. The return time is 15 seconds nominal for 90°. The National Fire Protection Association NFPA 92A Standard for Recommended Practice for Smoke-Control System and UL 864 Standard for Control Units and Accessories for Fire Alarm Systems, require weekly self-tests for dedicated smoke control equipment used in a smoke control system. The National Fire Protection Association NFPA 72 Standard for National Fire Alarm Codes states that all life-safety systems are to be functionally checked at least annually. The GRD actuator does not require any periodic cycling to function properly as an integral part of an active smoke control damper system. Check the smoke control damper/actuator every time you functionally check your smoke detectors, emergency lights, and/or power generators for operation. Installation See OpenAir® GRD Series Electronic Damper Actuator Designed for UL Listed Fire/Smoke and Smoke Control Dampers Installation Instructions (A6V11416635) for detailed guidelines. CAUTION: Read and carefully follow the Installation Instructions to avoid equipment damage.

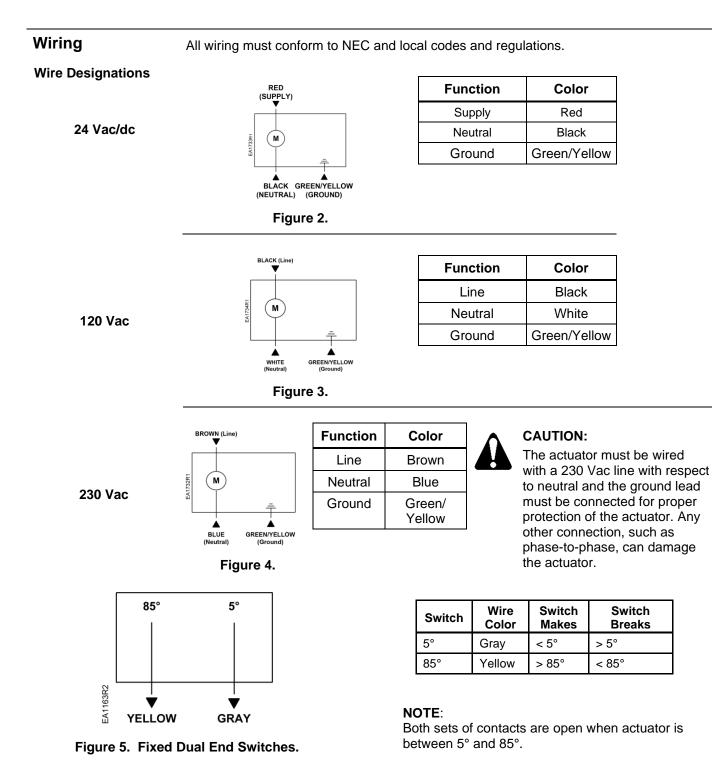



CAUTION:


Mixed switch operation to the switching outputs of both dual end switches (5° and 85°) is not permitted.

Either AC line voltage from the same phase must be applied to all four outputs of the fixed dual end switches, or UL-Class 2 voltage must be applied to all four outputs.

Wiring, Continued

NOTE:

If you are not using an EFL, do not modify the actuator. An EFL or jumper must be installed for actuator to work properly.





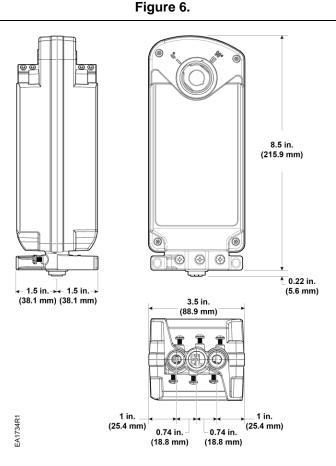


Figure 7. Dimensions of the OpenAir GRD Actuator in Inches (Millimeters).

Information in this publication is based on current specifications. The company reserves the right to make changes in specifications and models as design improvements are introduced. OpenAir is a registered trademark of Siemens Schweiz AG. Other product or company names mentioned herein may be the trademarks of their respective owners. © 2020-2022 Siemens Industry, Inc.

Siemens Industry, Inc. Smart Infrastructure 1000 Deerfield Parkway Buffalo Grove, IL 60089 USA + 1 847-215-1000 Your feedback is important to us. If you have comments about this document, please send them to <u>sbt_technical.editor.us.sbt@siemens.com</u> Document No. A6V11486815 Printed in the USA Page 6